


AJ-301C


Control Terminal



Data port


Charging port

LAN port



Hole for hanging x2

AJ-301C turns on automatically when power is turned on and turns off automatically when power is turned off. The following describes the power-on screen:

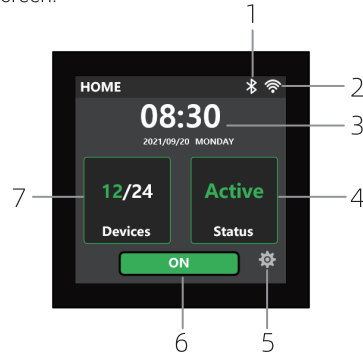

1 Bluetooth Icon

Displays the status of the Bluetooth connection between the control terminal and the jammers. The icon is not displayed if no device is online in the system.

2 WIFI Icon

Shows that the AJ-301C is connected to WIFI

3 System Time

⚙️ [Settings]>[system Settings]>[System Time]

4 Device Working Status

Displays the total number of jammers in the system and the current online number. Click to see the online status and power of online devices.

5 Settings

Click ⚙️ to enter the *Settings* screen, you can set *Device Management* , *System Settings*, and see system information.

Device Management screen, you can add devices, delete devices. jammers must be added manually when the system is first assembled. The jammer's code can be found on the label.

System Settings screen, you can set *Jamming Timer*, *System Time*, *Preference*, *Remote*, *Language*, *Password*, *Screen Breath Time* and *Conference Monitor*.

6 Control Button

Click to turn on/off the jamming of all normal working jammers in the current system.

7 Quantity of Devices

Displays the working status of the jammers in the system, click to see the device online/offline.

Add Device

Click ⚙️ [Settings] > [Device Management] > [Add Device]. Slide up and down the list of jammers and find the corresponding jammer code (S/N code). Click on it and follow the prompts to complete the adding device.

Delete Device

Click ⚙️ [Settings] > [Device Management] > [Delete Device]. Slide up and down the list of jammers and find the corresponding jammer code (S/N code). Click on it and follow the prompts to complete the adding device.

Scan the following control terminal applet code to turn the jamming on/off, adjust the jamming power from your phone, etc..

(Optional Function)




Specification

Power consumption	10W max.
Working voltage	DC 5V2A
Working temperature	-10℃~+45℃
Working humidity	≤ 85%. No condensation
Storage environments	93%, 25℃
Display screen	3.92 inch 320*320px touchscreen
Supported jammer	32
Dimensions	(86.75x86.75x21.65)mm ±1mm
Weight	113g
Color	Black panel/gray housing (Cool Gray 9C)

Installation

- The AJ-301C can be wall mounted.
1. After selecting the mounting location, punch two mounting holes with a diameter of 6mm, a depth of 40mm and a distance of 60mm from each other.
 2. Place the plastic sleeve, gasket and screws on the corresponding holes. Tighten them with a Phillips screwdriver, then hang the AJ-301C and push it down.

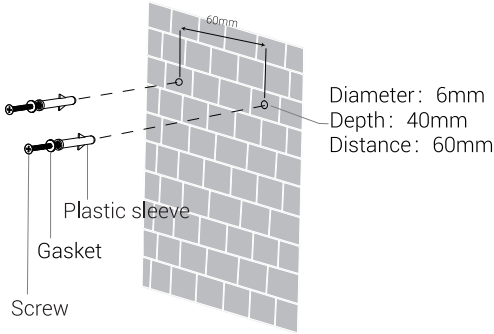

Notes

1. Do not use a power supply, charger or battery other than those originally supplied to power the device.
2. Do not expose the device to dusty and humid environments for a long time.
3. Do not use liquid solvents to clean the device, use a dry rag to gently wipe the surface dirt and dust.
4. Do not place the device in a place with extremely high or low temperature, the storage environment is -20℃ ~ 55℃, otherwise it will affect the service life of the device.
5. Do not expose the device to high temperatures or around heat generating equipment such as sunlight, heaters, microwave ovens, ovens or water heaters.
6. Do not expose the device to open flame as this may cause safety problems.
7. Do not drop, crush or puncture the device as this may cause abnormal operation or damage to the device.
8. Do not disassemble the device.