

iFace701

Face & RFID Time Attendance
With Simple Access Control Function



iFace701 is face identification device with Time Attendance and simple Access Control function. It adopts the latest platform, face algorithm with large capacity memory. By now, it can support 500 face capacity, 10,000 RFID capacity and 120,000 log capacity, which is suitable for big enterprises.

It Integrates with 800MHz high speed ZK Multi-Bio processor and high definition infrared camera which enables user identification in the dark environment. Face, RFID and password multiple identification methods make it more applicable. Multi-model communications consisting of RS232/485, TCP/IP and Wi-Fi/GPRS (optional) allow an extremely easy data management. Optional built-in 2000 mAh battery eliminates the trouble of power failure.

Features:



Big User Capacity



Schedule Bell



4.3" TFT Touch LCD



Building-in Audio Function



Multiple
Communication



Simple Access Control



USB Download




Wiegand Output

Specifications:

Display	4.3" Inch TFT Touch LCD
Sensor	ZK Latest Optical Sensor
Face Capacity	500 pcs
ID Card Capacity	10,000 pcs
Logs Capacity	120,000
Algorithm	ZKFace VX 7.0
Verification Speed	Less than 1s
Communication	USB Host, TCP/IP, RD232/485
Access Control Interface	for 3 rd Party E-lock, Door Sensor, Exit Button
Standard Functions	Automatic Status Switch, Self-service Query, T9 input, Schedule Bell, Work Code, 9 digital user ID, etc
Optional Functions	IMF Module, Web Server, 2000mAh backup battery, WiFi
Operating Temperature	0 °C to 45 °C (-5 °F to 122 °F)
Operating Humidity	20% to 80%
Power Supply	DC 12V 3A
Dimension	193mm * 165mm * 112mm
Gross Weight	About 1.5KG
Software	ZKTime.NET (Free)

Dimension:

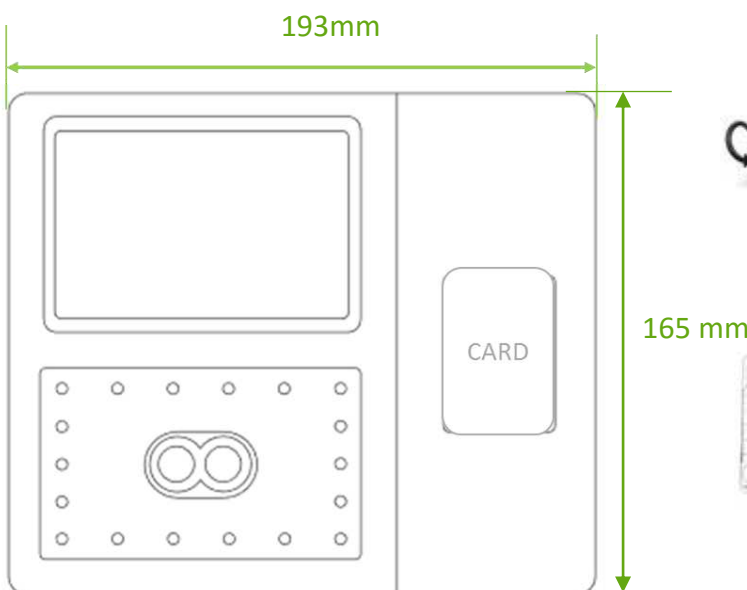

Packing List:



Power Adapter



Screws & Holders



Mounting Paper



Back Plate

