

Chapter 1: Biometric Devices


Chapter 2: Smart Home

Chapter 3: Smart Security

ONE-STOP STATION SUPPLIER of SMART HOME & SMART SECURITY PRODUCTS

JAN, 2021

Chapter 1: Biometric Devices

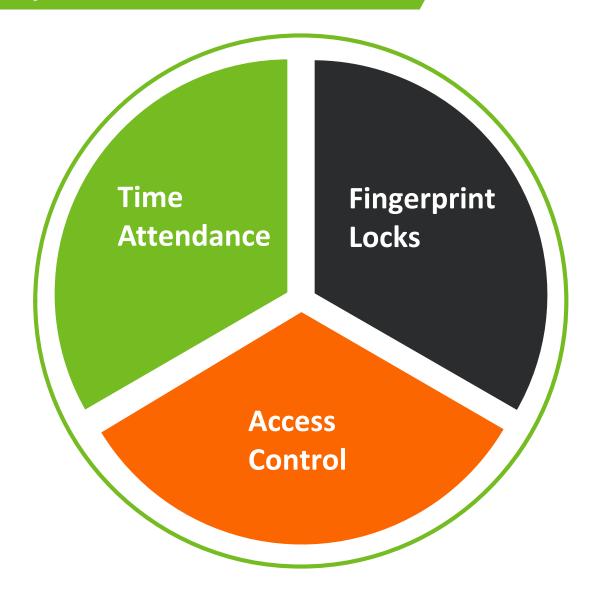

Time Attendance



ST300: Fingerprint Time Attendance

- ◆2.8" TFT LCD
- ◆ Fingerprint Capacity: 2,000
- ◆Log Capacity: 80,000
- Communication: USB Host, TCP/IP
- Standard Functions: Self Service Query, T9 Input,
- Schedule Bell, SSR and Network Report
- Optional Functions: ID/MF module

TX628: Fingerprint Time Attendance



- ◆3.0" TFT LCD
- Fingerprint Capacity: 3,200
- ◆Log Capacity: 120,000
- Communication: USB Host, USB Client, TCP/IP
- Standard Functions: DST, Self Service Query, T9
 Input, Schedule Bell, SSR and Network Report
 Optional Functions: ID/MF module, ADMS

Time Attendance



FA360: Face & FP Time Attendance and Access Control

- ◆2.8" TFT LCD
- ◆ Face Capacity: 1500
- ◆ Fingerprint Capacity: 2000
- ID Card Capacity: 2000
- Log Capacity: 50,000
- Communication: TCP/IP, RS232 and USB Host
- Standard Functions: ADMS, webserver, Scheduled bell, Workcode, SMS, T9 input, DLST, Self inquiry, Photo-ID, User role, Data encryption, User expiration rule, Simple Access Control function

UF100PLUS: Face & FP Time Attendance



- ◆2.8" TFT LCD
- ◆ Face Capacity: 300
- ◆ Fingerprint Capacity: 1000
- ◆Log Capacity: 100,000
- Communication: USB Host, TCP/IP, WiFi
- Standard Functions: DST, Self Service Query, T9
- Input, Schedule Bell, SSR Report
- Optional Functions: ID/MF module

Access Control



F22: Fingerprint Access Control

- ◆2.4 inch TFT-LCD screen
- Fingerprint Capacity: 3,000
- Log Capacity: 30,000
- Communication:TCP/IP, RS232/485, USB Host, WiFi
 Access Control Interface for electric lock, door
- sensor, alarm, exit button and door bell.
- Wiegand input & output

SF400: Fingerprint Access Control

- 2.8-inch Color Display and Touch Screen
- ◆ Fingerprint Capacity: 1,500
- Log Capacity: 80,000
- Communication:TCP/IP, RS485, USB Host
- Access Control Interface for electric lock, door sensor, alarm, exit button and door bell.

Wiegand input&output

◆1 ea Aux. input for linkage function



Access Control





Mini AC Plus: Palm & Face Access Control

- ♦ 5" TFT Touch LCD
- Capacity: 3000Face + 1500Palm +3000Card(Optional)
 Communication: TCP/IP, WG In/Out, RS485, RS232
 Standard Functions: ADMS, webserver, Scheduled bell, Workcode, SMS,T9 input, DLST, Self inquiry, Photo-ID
 Access Control Interface for Third Party Electric Lock, Door Sensor and Exit Button, Alarm
 Optional Functions: MF, WiFi

SpeedFace V5L: Palm & Face & FP Access Control

- ◆5" TFT Touch LCD
- Capacity:6000Face+3000Palm+6000FP+10000 Card
- ◆Log Capacity: 200,000
- Communication: TCP/IP, WG In/Out, RS485, RS232
- Standard Functions: ADMS, WiFi, webserver, SSR Scheduled bell, Workcode, SMS, DLST, Photo-ID, etc
- Access Control ports for Lock, Door Sensor, Exit Button, Alarm, Reader



Fingerprint Lock





- ◆1.77" TFT Color Screen & Touch keyboard
- ◆ Capacity: 2000 FP, 1000 Card, 1000 PW
- Optical Fingerprint Sensor
- Verification Mode: FP, Card, PW, Remote Controller (Optional)
- Standard Function: Door Bell, Attendance log export, USB Emergency Power Input
- Power: 4pcs * Battery
- ◆ Suitable for frameless Glass Door

LK-1108: Fingerprint Lock

- ◆1.77" TFT Color Screen & Touch keyboard
- Semi-Conductor Fingerprint Sensor
- ◆ Capacity: 2000 FP, 1000 Card, 1000 PW
- Verification Mode: FP, Card, PW, Remote Controller (Optional)
- Standard Function: Door Bell, Attendance log export,
 USB Emergency Power Input
- Power: 4pcs * Battery
- Suitable for frameless Glass Door



Fingerprint Lock




LK-8801: Fingerprint Lock

- 2.4" TFT Color Screen & Touch keyboard
- ◆ Capacity: 2000 FP, 1000 Card, 1000 PW
- Optical Fingerprint Sensor
- Verification Mode: FP, Card, PW, Remote Controller (Optional)
- Standard Function: Door Bell, Attendance log export, USB Emergency Power Input
- Power: 4pcs * Battery
- ◆ Suitable for frameless Glass Door

LK-9908: Fingerprint Lock

- 2.4" TFT Color Screen & Touch keyboard
- Semi-Conductor Fingerprint Sensor
- ◆ Capacity: 2000 FP, 1000 Card, 1000 PW
- Verification Mode: FP, Card, PW, Remote Controller (Optional)
- Standard Function: Door Bell, Attendance log export,
 USB Emergency Power Input
- Power: 4pcs * Battery
- Suitable for frameless Glass Door

Chapter 2: Smart Home

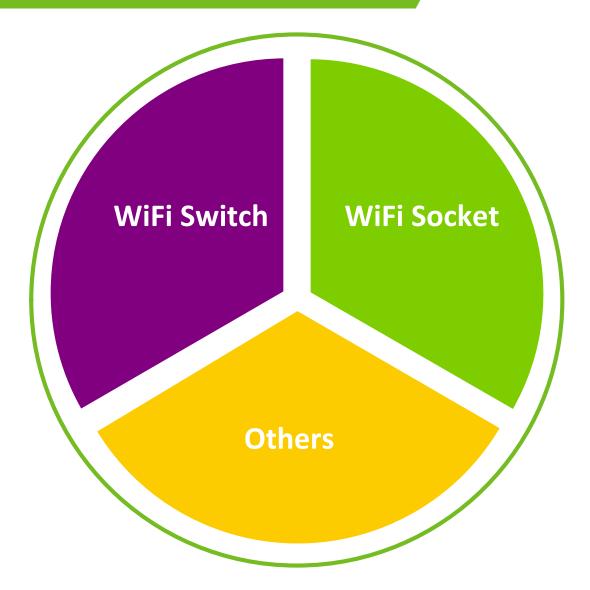

Smart WiFi Switch



Smart WiFi Light Switch: US Standard

- Compatible with Tuya, Alexa, Google Home, IFTTT
 Remote Control, Voice Control, Machenical Control
 Timer and Counterdown function
 Can realize Scenerio Management
 Max. Load: 10A/2200W/Gang
- Wireless Type: WiFi 2.4Ghz (IEEE802.11b/g/n)
- Material: Fire Retardant ABS & Glass
- App (IoS & Android): Tuya Smart, Smart Life

Smart WiFi Light Switch: EU Standard

- ◆ Compatible with Tuya, Alexa, Google Home, IFTTT
- Remote Control, Voice Control, Machenical Control
- Timer and Counterdown function
- Can realize Scenerio Management
- Max. Load: 10A/2200W/Gang
- Wireless Type: WiFi 2.4Ghz (IEEE802.11b/g/n)
- Material: Fire Retardant ABS & Glass
- ◆ App (IoS & Android): Tuya Smart, Smart Life



Smart WiFi Switch



Smart WiFi Light Switch: US Standard

- Compatible with Tuya, Alexa, Google Home, IFTTT
- Remote Control through App or touch board control
 Timer and Counterdown function
- Input Voltage: 95-250V AC 50-60hz
- Max. Load: 10A
- Wireless Type: WiFi 2.4Ghz (IEEE802.11b/g/n)
- Material: Fire Retardant ABS & Glass

Smart WiFi Light Switch: EU Standard



- ◆ Compatible with Tuya, Alexa, Google Home, IFTTT
- Remote Control through App or touch board control
- Timer and Counterdown function
- Input Voltage: 95-250V AC 50-60hz
- Max. Load: 10A
- Wireless Type: WiFi 2.4Ghz (IEEE802.11b/g/n)
- Material: Fire Retardant ABS & Glass

Smart WiFi Power Socket







Smart WiFi Power Socket: US Standard

- Compatible with Tuya, Alexa, Google Home, IFTTT
- Remote Control through App
- Timer and Counterdown function
- Max. Loading Current: 10A
- ♦ Working Current: AC 90~250V
- Size: 53mm*53mm*52mm

Smart WiFi Power Socket: EU Standard

- Compatible with Tuya, Alexa, Google Home, IFTTT
 Remote Control through App
- Timer and Counterdown function, Power statistics
- ◆ Max. Loading Current: 16A
- ♦ Working Current: AC 90~250V
- Size: 62mm*62mm*85mm

Smart WiFi Power Socket: UK Standard

- ◆ Compatible with Tuya, Alexa, Google Home, IFTTT
- Remote Control through App
- Timer and Counterdown function, Power statistics
- Max. Loading Current: 16A
- ♦ Working Current: AC 90~250V
- Size: 60mm*60mm*58mm

Other Smart Home Items




Smart WiFi LED Bulb

- Compatible with Tuya, Alexa, Google Home, IFTTT
 Remote Control through App
- Color(RGB 16million), Brightness, Temperature could be adjustable
- Scenery settings and switch
- Timer and Counterdown function
- Power Consumption: Max. 7.5W
- Medium Base: E27/E26

More items to be continued~

Chapter 3: Smart Security

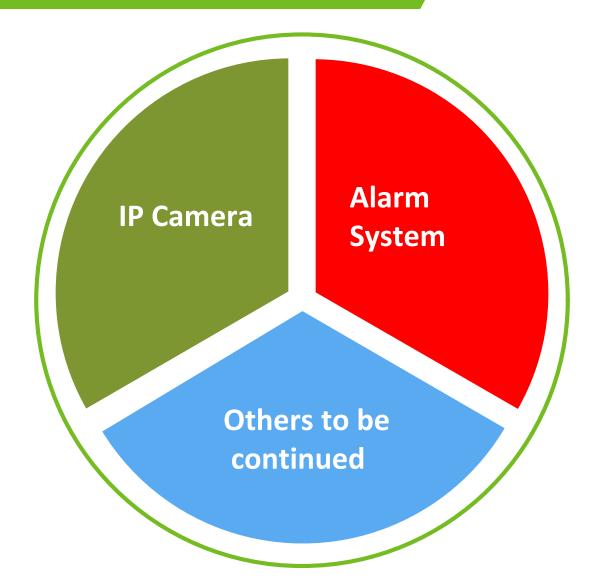

Smart Alarm System



WIFI and 2G Smart Alarm System KIT

- 4.3" Touch Screen and Semi-conductor FP Sensor
 Embedded Temperature and Humidity Sensor
 Compatible with Tuya, Alexa, Google Home, IFTTT
- Alarm hub adopts 2.4TFT LCD with embedded SOS
 SuppoSupportGSM/GPRS network and WiFi(IEEE802.11b/g/n)
- Support Multiple Alarm notifications(APP Push /SMS /Voice)
- Support phone/SMS/APP remote settings
- Up to 99 wireless zones and 3 wired zones
- ◆ 10 RFID tags and 10 remote tags can be learned
- Support 5 groups preset alarm phone number
- Arm schedule and disarm schedule
- Pre-record 20s of Alarm Voice Message
- Multiple languages are available, up to 11 languages
- System will be blocked for 90s after 5times continous wrong passwords
- Support external wireless sirens
- App: tuya (iOS and Android)

Smart Alarm System



WIFI and 4G Smart Alarm System KIT

- Compatible with Tuya, Alexa, Google Home, IFTTT
 Alarm hub adopts 2.4TFT LCD with embedded SOS
 Support 4G GSM network(850/900/1800/1900MHz) and WiFi(IEEE802.11b/g/n)
- Support Multiple Alarm notifications(APP Push /SMS /Voice)
- Support phone/SMS/APP remote settings
- Up to 99 wireless zones and 3 wired zones
- ◆ 10 RFID tags and 10 remote tags can be learned
- Support 5 groups preset alarm phone number
- Arm schedule and disarm schedule
- Pre-record 20s of Alarm Voice Message
- Multiple languages are available, up to 11 languages
- System will be blocked for 90s after 5times continous wrong passwords
- Support external wireless sirens
- App: tuya (iOS and Android)

Smart Alarm System



WIFI and GSM/GPRS Smart Alarm System KIT

- ◆ Compatible with Tuya, Alexa, Google Home, IFTTT
- Support 2G GSM/GPRS network and WiFi(IEEE802.11b/g/n)
- Support Multiple Alarm notifications(APP Push /SMS /Voice)
- Support phone/SMS/APP remote settings
- ◆ Up to 99 wireless zones
- ◆ 10 RFID tags and 10 remote tags can be learned
- Support 5 groups preset alarm phone number
- Arm schedule and disarm schedule
- Pre-record 20s of Alarm Voice Message
- Multiple languages are available, up to 11 languages
- System will be blocked for 90s after 5times continous wrong passwords
- Support external wireless sirens
- App: tuya (iOS and Android)

Smart Alarm System

tuya

nside



Wireless Door/Window Sensor with Emergency Button

- Low battery report, Open/Close report
- Compatible transmission code: EV1527/2262
- RF Frequency: 433MHZ, 315/868MHZ (optional)
- Power: 3V Coin battery
- ◆ Emission Distance: ≥80m (Open area)



Smart WiFi Door/Window Sensor

- Compatible with Tuya, Alexa, Google Home, IFTTT Realize linkage function with other smart home items like Bulb, Power Socket
- Tamper alarm and low battery alarm through App
- Remote monitoring door/window status and push notification
- Power supply: AAA battery x2
- App(Android & iOS): Tuya Smart, Smart Life

Smart Alarm System



Wireless Smoke Detector

- ◆ Sensor: Photoelectronic
- Audio Alarm: 80dB@10ft
- RF Frequency: 433MHZ, 315/868MHZ(optional)
- Sensitivity of Smoke: II Grade
- ◆ Emission Distance: ≥80m (Open area)
- Power: 9-Volt Battery
- Alarm output: sound and flash alarm

Wireless PIR Sensor

- Low battery alarm alert
- Compatible transmission code: EV1527/2262
- RF Frequency: 433MHZ, 315/868MHZ (optional)
- ◆ Detection Scope: <12m/110°
- Power: 1.5V AA Battery x3
- ◆ Emission Distance: ≥80m (Open area)
- Low power consumption, long battery life (standby 2 years)



Smart Alarm System



Wireless Siren

- Power: AC 110-240V
- Backup battery: AAA 7.4V
- RF Frequency: 433MHZ, 315/868MHZ (optional)
- Emission distance \geq 80m (open area)
- Compatible transmission code: EV1527/2262
- ♦ Alarm Volumn: 110DB



Wireless Water Leakage Sensor

- Voltage: DC30V/ 1A
- Operating voltage:3V
- RF Frequency: 433MHZ, 315/868MHZ (optional)
- ◆ Emission distance≥80m (open area)
- Operating temperature :-10°C ~+50°C

Smart IP Camera





Summer manner

Smart IP Camera: 1080P

- 3.6mm @ F2.56, projection Angle at around 71°
 IR distance: Around 10m
- PT: PAN @ 355°, TILT @ 100°(Up) and 12°(Down)
- Micro SD card supported: 128GB(Max.)
- Camera Functions: Moiton Detection Alarm, Motion
- Tracking, Two-way audio, Alarm Push Notification
- Network: WiFi, RJ45 (Optional)
- Compatible with Tuya, Amazon Alexa, Google Assistant, IFTTT

Smart IP Camera for outdoor: 1080P

- ◆3.6mm, projection Angle at around 75°
- ◆IR distance: Around 25m
- ◆ PT: PAN @ 355°, TILT @ 110°
- Micro SD card supported: 128GB(Max.)
- Camera Functions: Moiton Detection Alarm, Motion
- Tracking, Two-way audio, Alarm Push Notification
- ◆ Network: WiFi, RJ45 (Optional)
- Compatible with Tuya, Amazon Alexa, Google Assistant, IFTTT



Looking forward to our cooperation!









Web: <u>www.isecus.com</u> Email: <u>sales@isecus.com</u> **SGCUS**