User Manual-Smart Cylinder


TUYA BLE VERSION




Smart your life! Version 1.0 Edition S1

Packing Accessories


Please check the packing box and accessories when you got the item in hand.

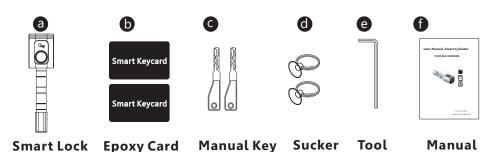


2 Product Specification

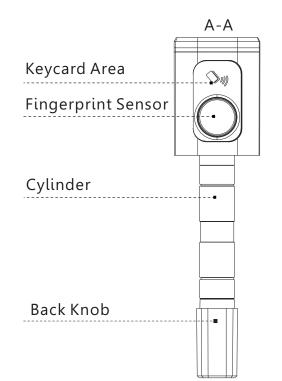



B Reader View





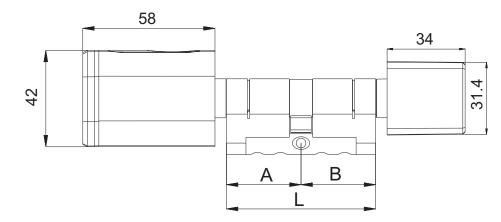







INSTALLATION STEPS

5.1 Please use the screw driver to take off the screw on the back knob position, refer the below Pic.1:

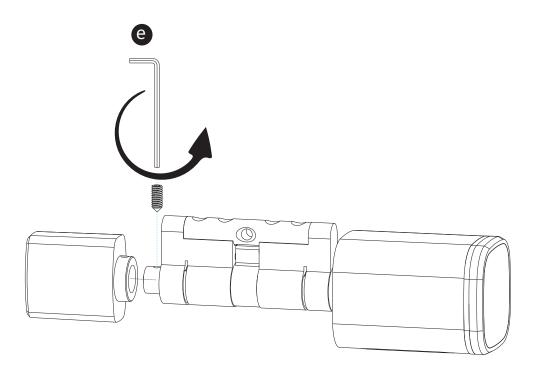

5.2 Please insert the cylinder to the existed lock and fix the cylinder with the long screw as picture 2.

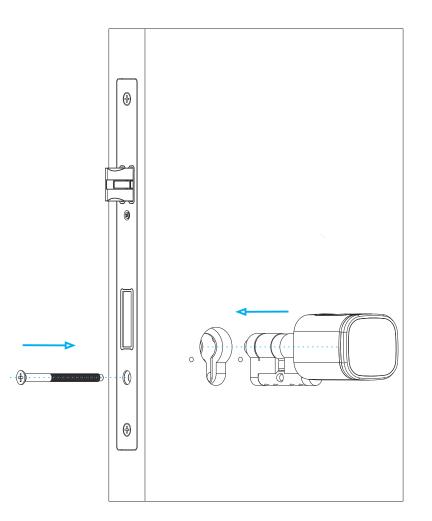







4

5.3 Please use the screw driver to fasten the screw on the back knob position, refer the below picture 3:

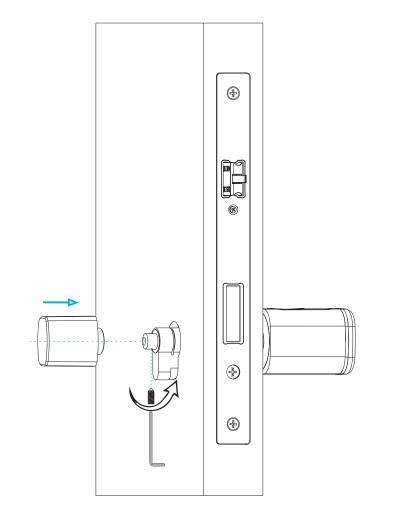




5.4 Please take off the reader cover with the magnet or sucker (included in our accessories bag),assemble 1xCR123a alkaline battery, refer the below picture 4:

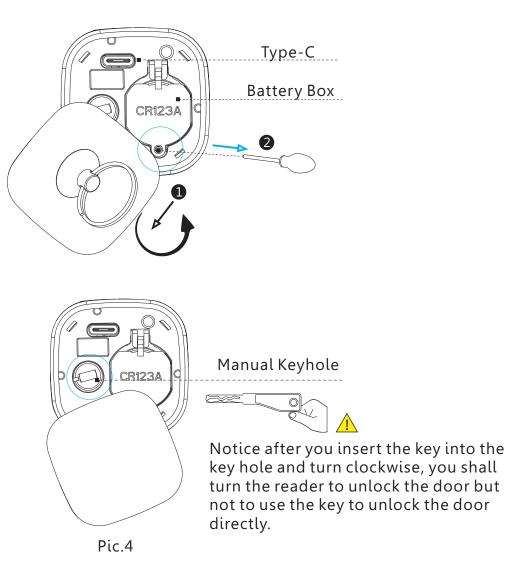


5.5 Please test with your fingerprint under the factory state, any fingerprint will unlock the door lock, refer the below picture 5:

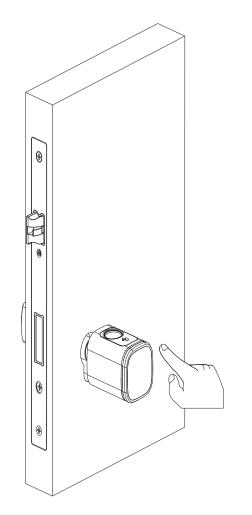



5.6 Please test the lock with key card after you configure the lock with Tuya smart APP(Refer the Part 6).

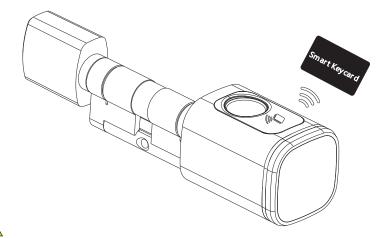

Notice the keycard or fingerprint can only be enrolled by the Tuya smart APP, so it is important to install this app in your mobile before start daily use.



 \land

6.Tuya APP Settings

Please download the Tuyasmart or Smart life on Apple store or Google play. also you can scan the QR code below to download the APP directly.



6.1 Please register one account with your E-mail or mobile number.



6.1.1 Sign Up



6.1.3 Enter the code sent to your mail or mobile

Register	
Brazil	
test@abcd.com	
Get Verificati	on Code
I Agree User Agreeme	nt and Privacy Polic
	G

6.1.2 Enter mobile or mail Get Verification Code



6.1.4 Set password and login

6.2 Intelligent Configuration

Please run the Tuya smart APP and click "Add Device" on the right top position for auto scan:

My Home *	Add Device 🕀	Done
Cotor Home Cator Add Device	Searching for nearby devices. Make sure your device has entered pulling mode.	Added.
with ambient indicators and	Discovering devices	Device added successfully Master Bedroom Living Room
All Devices Master Bedroom Living ····	Add Manually	
Smart Cylinder	Electrical Booket	
E Cylinder	Dylang V V	
- Structure Structure	Sensors Play Socket Socket (R.E+WX-FI) (VX-FI) (Zignee)	
1	Large to the test to the test test test test test test test	
Smart BLE Lock 2	Sanal Horne Socket Socket Socket Apeliances (BLT) (NB-67) (ethor)	
- Key Box	Kitchen Power Binp Applances	
	Breactive + VV + VV + VV Security & Power Strip Power Strip	
Step 1	Step 2	Step 3
Add Device	Activate the lock Click "Add"	Done

6.3 Function Description

Under Tuya smart APP interface, you can see the features for the smart locks, such as Memeber /unlock records and settings etc.


#1 P 🗊

 \mathbf{O}

	11:16 🕫	11:16 4	
	<	Settings	
	Singerarint Me	Caro Managem	
	Smart Lin	ikage	
	Remote L	Inlocking	
Tap and Hold to Unlock	automatic	lock switch	
No messages.			
e e e e			
oer Menage., Unicoving Records Smart Linkege Settings			

6.4 Add User Fingerprint

Under Tuya smart APP setting, you can click the fingerprint management and add the fingerprint.

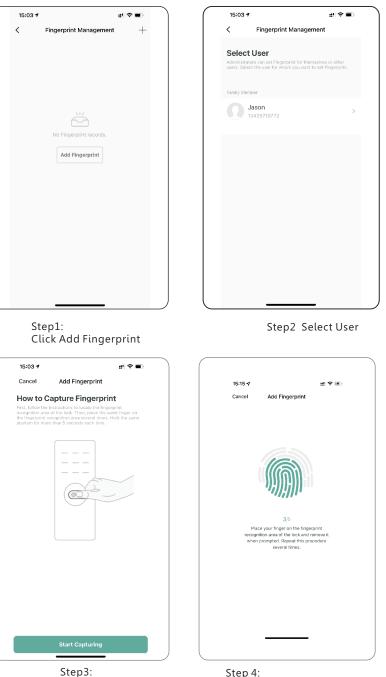


Start Capturing

Step 4: 5 Times and done 9


6.5 Add User Card

Under Tuya smart APP setting, you can click the card Management and add the card.

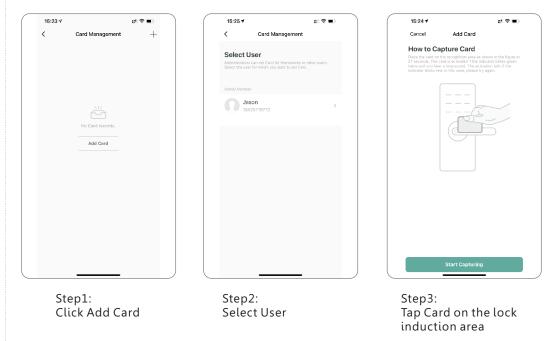


6.7 Smart Linkage and Settings

Under the settings, you can click the smart linkage for more scene and more options for the features upon the using condition.




6.8 Passage Mode

Under Tuya smart APP setting, you can tick "automatic lock switch", under this settingthe lock will be in always open state, you can press any valid fingerprint to cancelthis passage mode.



7. Reset the Lock

Under Tuya smart APP setting, you can click the "**Remove Device**" to reset the lock and the lock will be set to factory state, you can use any fingerprint to unlock the lock.



8. Sales and Service Terms

- Please read the manual carefully before use!
- Limited 1-year Electronic Warranty Limited Lifetime Mechanical and Finish Warranty
- This S1 product comes with a 1-year Limited Warranty on Electronic Parts and a Limited lifetime. Mechanical and Finish Warranty against defects in materials and workmanship under normal use to the original residential user. Proof of purchase and ownership is required for the warranty to be in effect.
- Any error or question in our manual or sales term, please feel free to contact with us.
- For any wrong operation or installation to the user, we do not responsible for the duty.
- For the damage caused by anthropic factor or inevitable reason, we do not pay for the loss or maintain for free, please check our after sale service terms.
- Please do not take apart the lock if you are not technician, if necessary, please make the operations under the guide of technician.
- Notice: there maybe a little difference for product pictures with real product, please subject to our real products.